


Email : sales@equipmentsexporters.com Phone: +91-9311469084

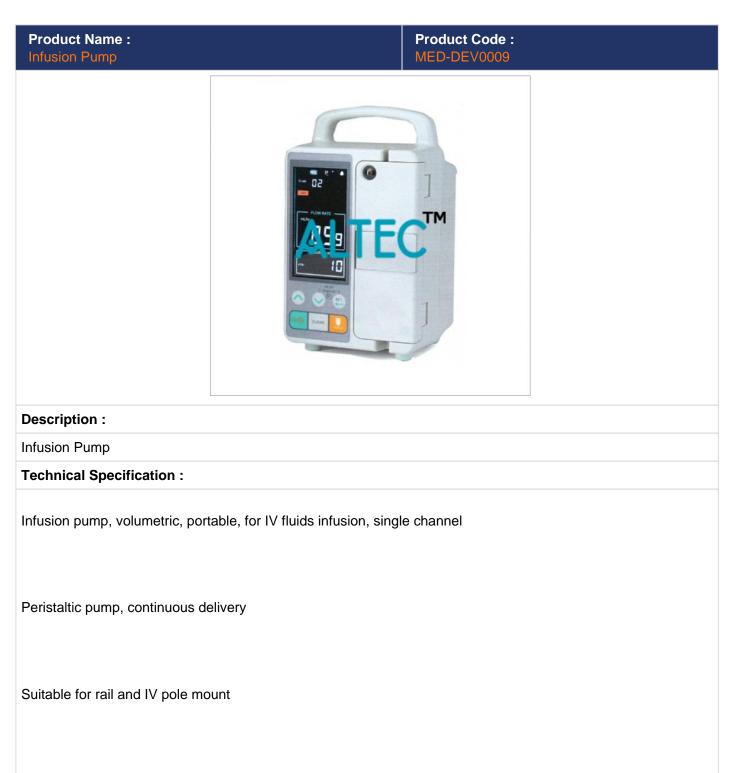

Bolus program, range :100 - 900 ml/h

Air bubble detection; Occlusion detection

Battery autonomy: > 5 h (at 30 ml/h)

Integrated battery charger

Power requirements: 110 - 220 V / 50 - 60 Hz.

Power consumption: 25 W

Programmable infusion by volume, time and flow-rate

Volume limit range 1 – 9,999 ml, 1 ml step

Sturdy construction, splash- and shock-proof, plastic enclosure.

Open system, compatible with commercial infusion sets

Flow-rate range 1 – 1,200 (minimum guaranteed) ml/h, 1 ml/h step, accuracy \pm 5 %

Battery and AC powered, with automatic switch between modes and automatic recharge when connected to mains

Display and control panel with visualisation of all working parameters and system messages

Audio/visual alarms, with silencing feature, for: occlusion, air-in-line, door open, status and end of infusion/program, battery/power supply status and failure, system errors

Equipments Exporters

Website: www.equipmentsexporters.com, Email: sales@equipmentsexporters.com Address: 75, Lajpat Nagar-IV, New Delhi-110024 Phone: +91-9311469084