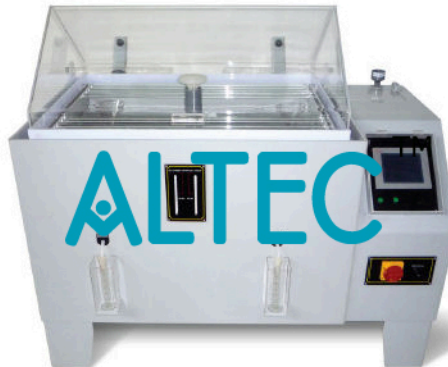


**Product Name :**  
Salt Spray Chamber**Product Code :**  
ALABS-A63-004**Description :****Salt Spray Chamber**

- It has the function to refill water automatically when water level is insufficient.
- The control instruments are mounted in one panel so it easy to operate and Clear at a glance.
- The thermometer is controlled by SSR with digital display in precision of 0.1.
- The test tank is heated directly by vapor so that the temperature rises fast and the stand by time shortened.
- The water spraying column equipped with the disperser has the functions to lead and adjust the reek and also has the function to make the falling reek even (the control).

**Safety Devices**

1. Water level controller 1 set
2. Lights for state warning: 3 pcs

3. Protection switches for over temperature: 2 sets

**Spraying Modes:**

- Nozzles (G): Glass nozzles. The accurate glass nozzles (brand Pyres)
- Quantity of spraying: 1~2mL/80C/1h (imported from America)

**Application Temperature:**

(1) Set the type according to the standards of CNS, JIS and ASTM:

The test method of salt water:

The lab: 35degC  $\pm$ 1degC

(2) The saturated air barrel: 47degC  $\pm$ 1degC

**The test method of corrosive resistant**

(1) The lab: 50degC  $\pm$ 1degC

(2) The saturated air barrel: 63degC  $\pm$ 1degC



## Equipments Exporters

**Website:** [www.equipmentsexporters.com](http://www.equipmentsexporters.com), **Email:** [sales@equipmentsexporters.com](mailto:sales@equipmentsexporters.com)

**Address:** 75, Lajpat Nagar-IV, New Delhi-110024 **Phone:** +91-9311469084